

Fig. 1

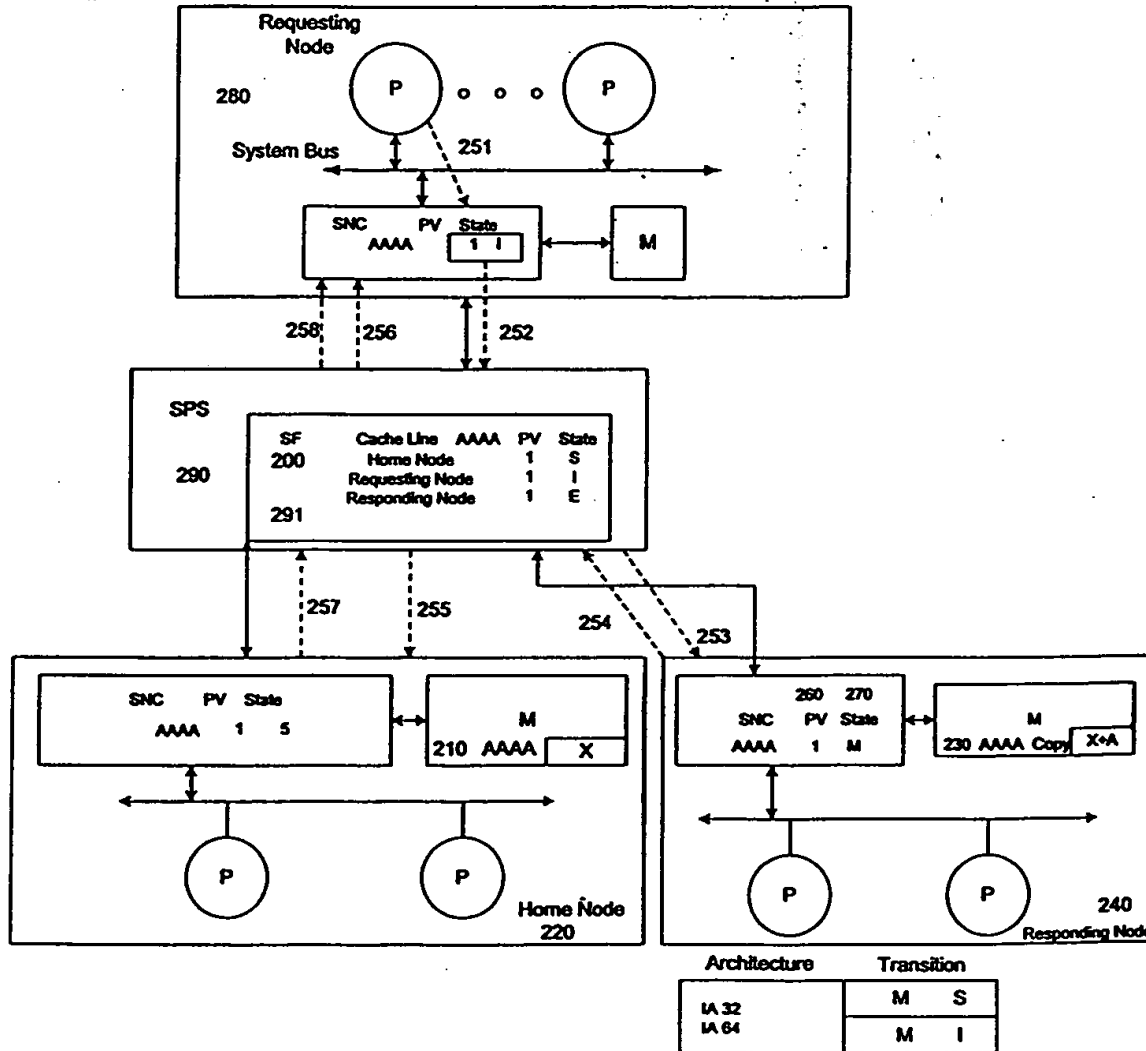


Fig. 2

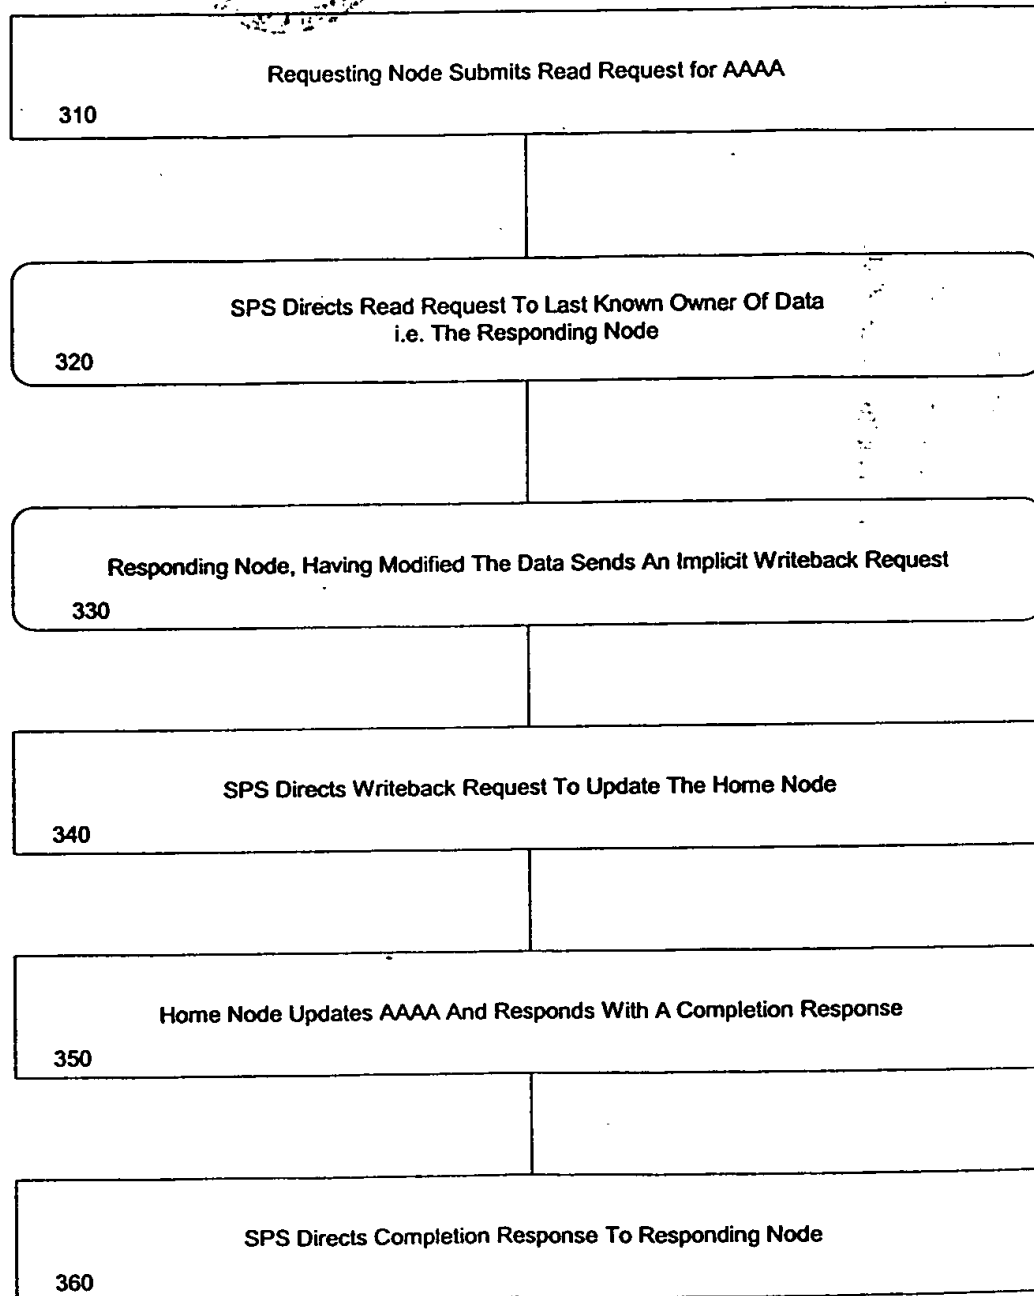


Fig. 3

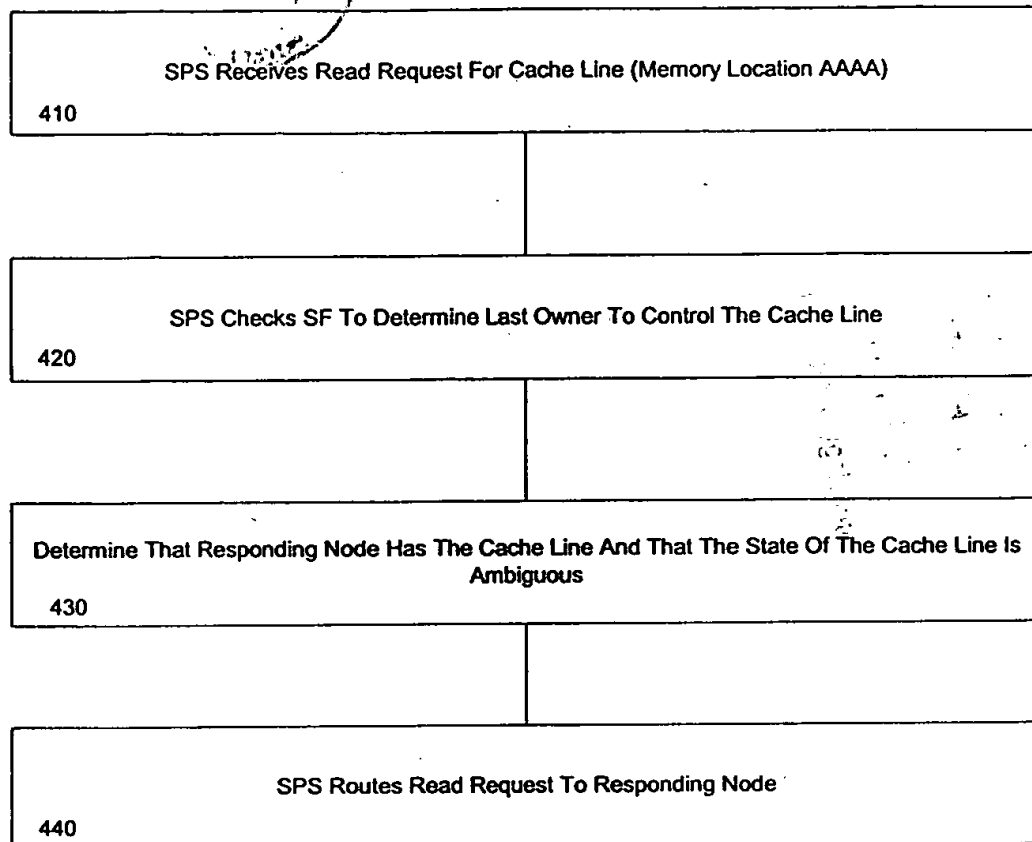


Fig. 4

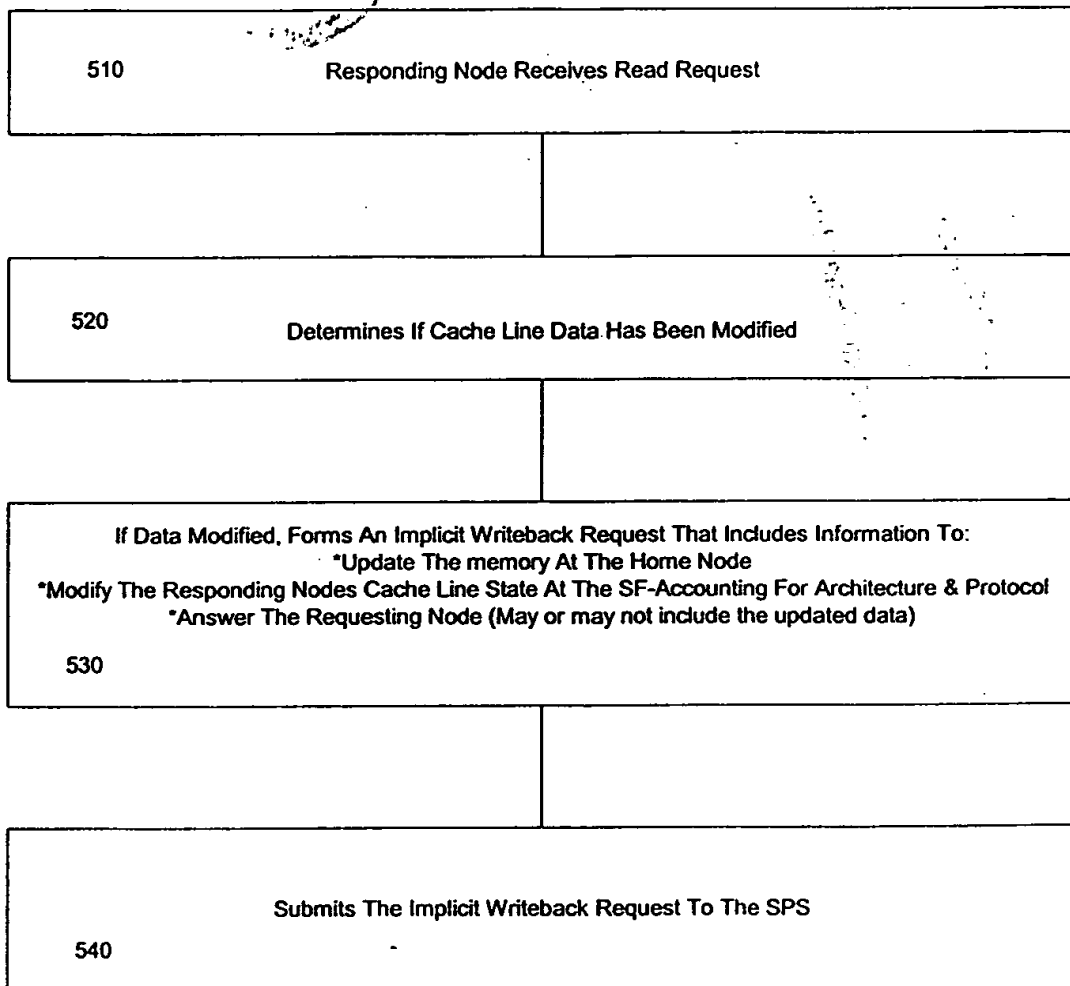


Fig. 5



	14 Bits	4 Bits	2 Bits	20 Bits
		620	610	
phit (0)	Reserved	Resp Type [3:0]	Route [1:0]	Reserved

	Route Bits	Conveyed Meaning
611	[1]	provide data to requesting node
612	[0]	update home node memory "I" implicit writeback

	Response Type Bits	Conveyed Meaning
614	[3:2]	type of response; "11" = snoop response
613	[1:0]	state; "10" M S: "11" = M S

Fig. 6



	Request	IA64	IA32	IOH	Route [1:0]
10	PRLC/PRLD	PSNRM	PSNRMS	PSNRM	11
20 30	PSIL PSILND	PSNRM PSNRM	PSNRM PSNRM	PSNRM PSNRM	11 10
40	PSFCL	PSNRM	PSNRM	PSNRM	10

Fig. 7

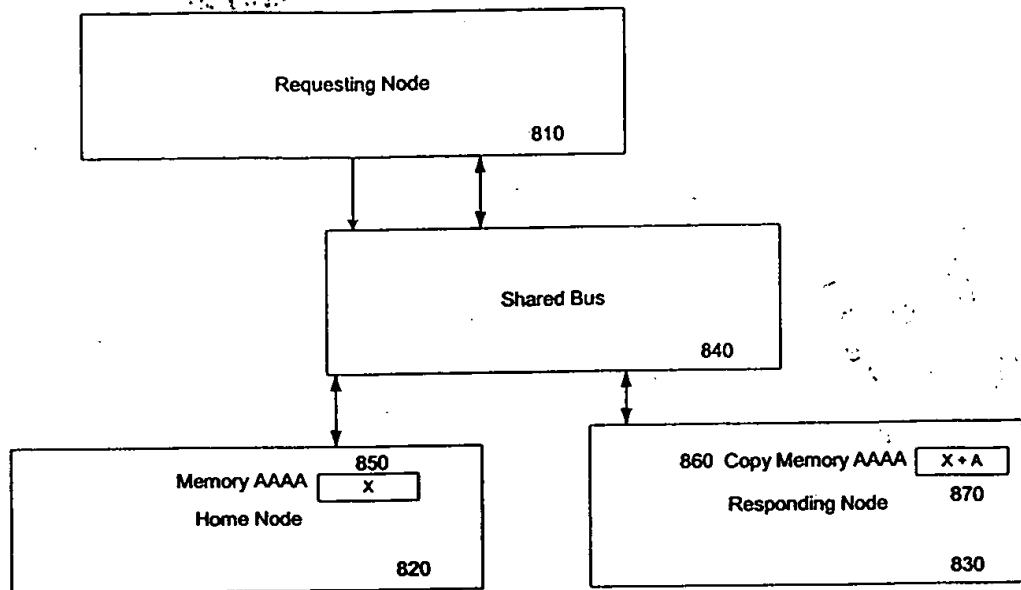


Fig. 8

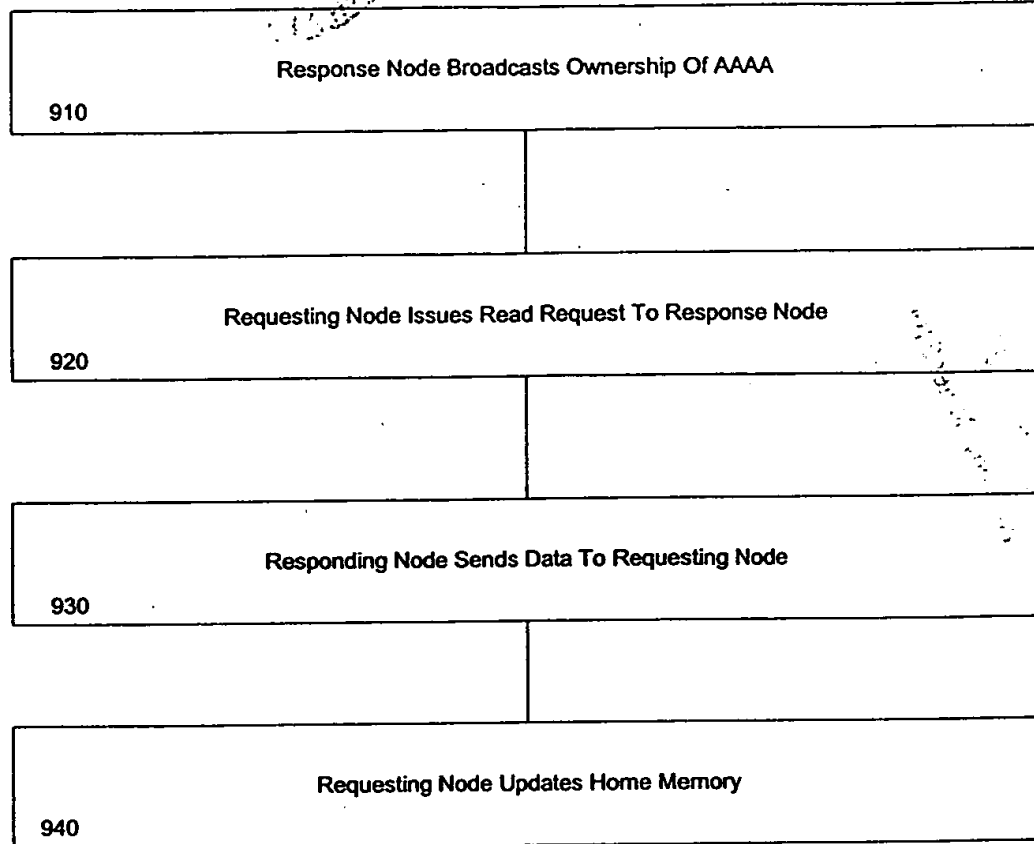


Fig. 9